

Kids Outdoor Double Lounge Chair



JENWOODHOUSE

MATERIALS:


- (4) 2x4x8 Ft. Boards
- (7) 1x4x8 Ft. Boards
- (3) 1x2x8 Ft. Boards
- (2) Outdoor Seat Cushions
- (3) Yards of Outdoor Fabric
- (1) 2 inch Hinge
- 2 ½ inch Exterior Wood Screws
- 1 ¼ inch Exterior Wood Screws
- 1 ¼ inch Brad Nails
- Exterior Wood Glue

TOOLS:

- Tape Measure
- Pencil
- Carpenter's Square
- Drill with 2 ¼ inch Hole Saw
- Circular Saw
- Brad Nailer or Hammer
- Clamps
- Safety Glasses
- Hearing Protection


CUT LIST:

(2) 2x4 @ 38 inches (deck frame)	(12) 1x4 @ 41 inches (decking, back slats)
(2) 2x4 @ 36 ½ inches (deck frame)	(1) 1x2 @ 41 inches (decking)
(1) 2x4 @ 33 ½ inches (deck frame)	(2) 1x2 @ 18 7/8 inches (back stiles)
(2) 2x4 @ 8 ½ inches (feet)	(1) 1x2 @ 16 ¼ inches (back stile)
(2) 2x4 @ 36 inches (back legs)	(4) 1x4 @ 5 ½ inches (console sides)
(2) dowel @ 1 ½ inches (back stops)	(1) 1x4 @ 26 ¾ inches (console bottom)
(2) 2x4 @ ~40 inches (middle legs)	(1) 1x4 @ 10 ¾ inches (console drink holder)
(2) 1x2 @ ~19 inches (top rails)	(2) ¼ inch ply @ 26 ¾ inches x 7 inches (console side panels)
(2) 1x2 @ 44 inches (top rails)	(1) 1x4 @ 12 ¼ inches (console drink holder)
	(1) 1x4 @ 14 ½ inches (console lid)

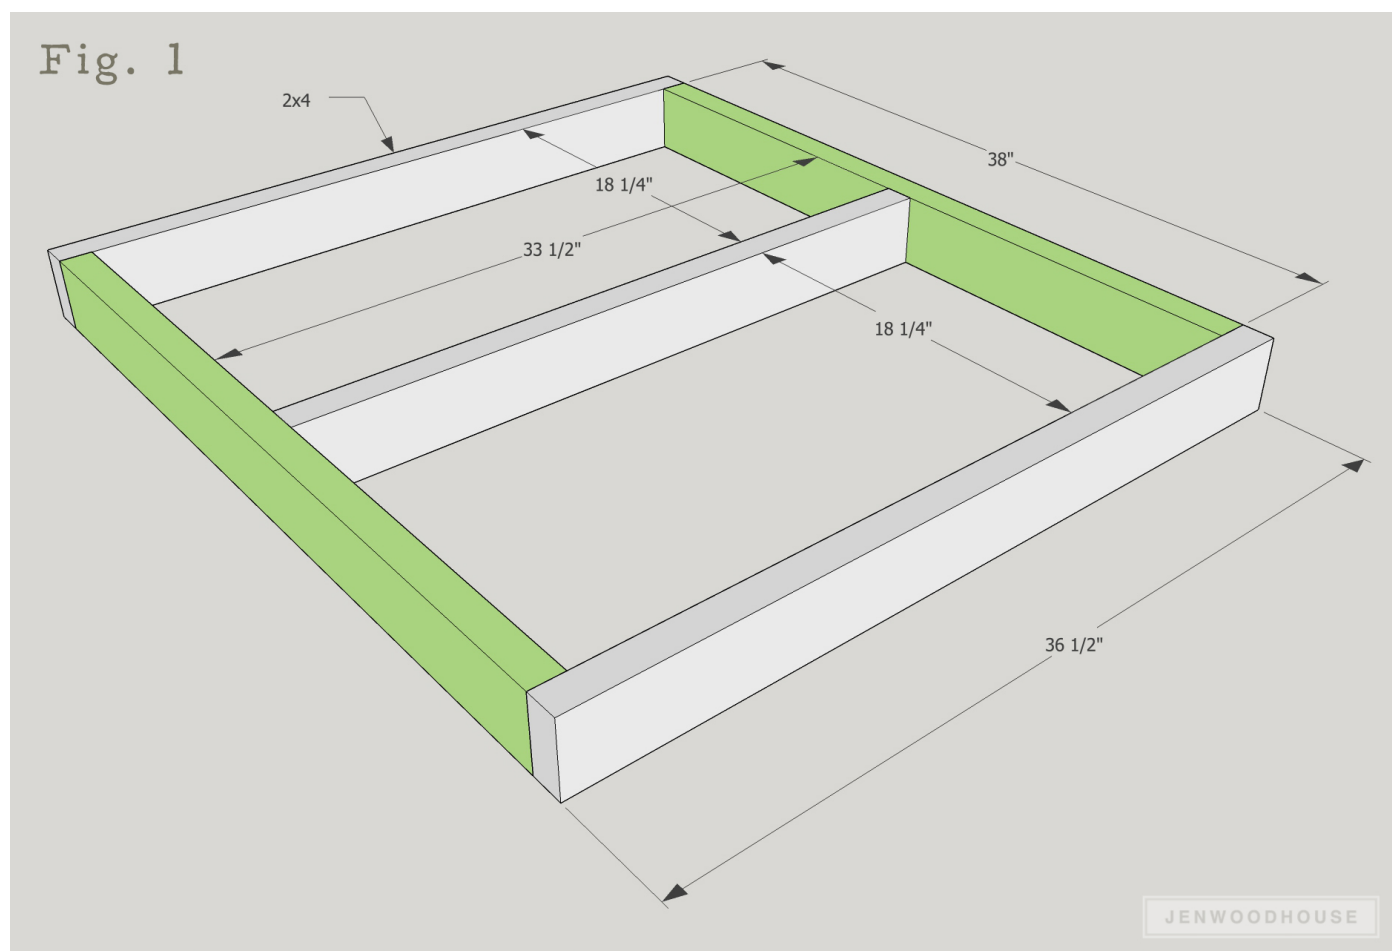


STEP 1 – BUILD THE DECK FRAME

Measure, mark, and cut 2x4 deck frame to length. Construct as shown, attaching with 2 ½ inch exterior wood screws. Check for square and adjust as needed.

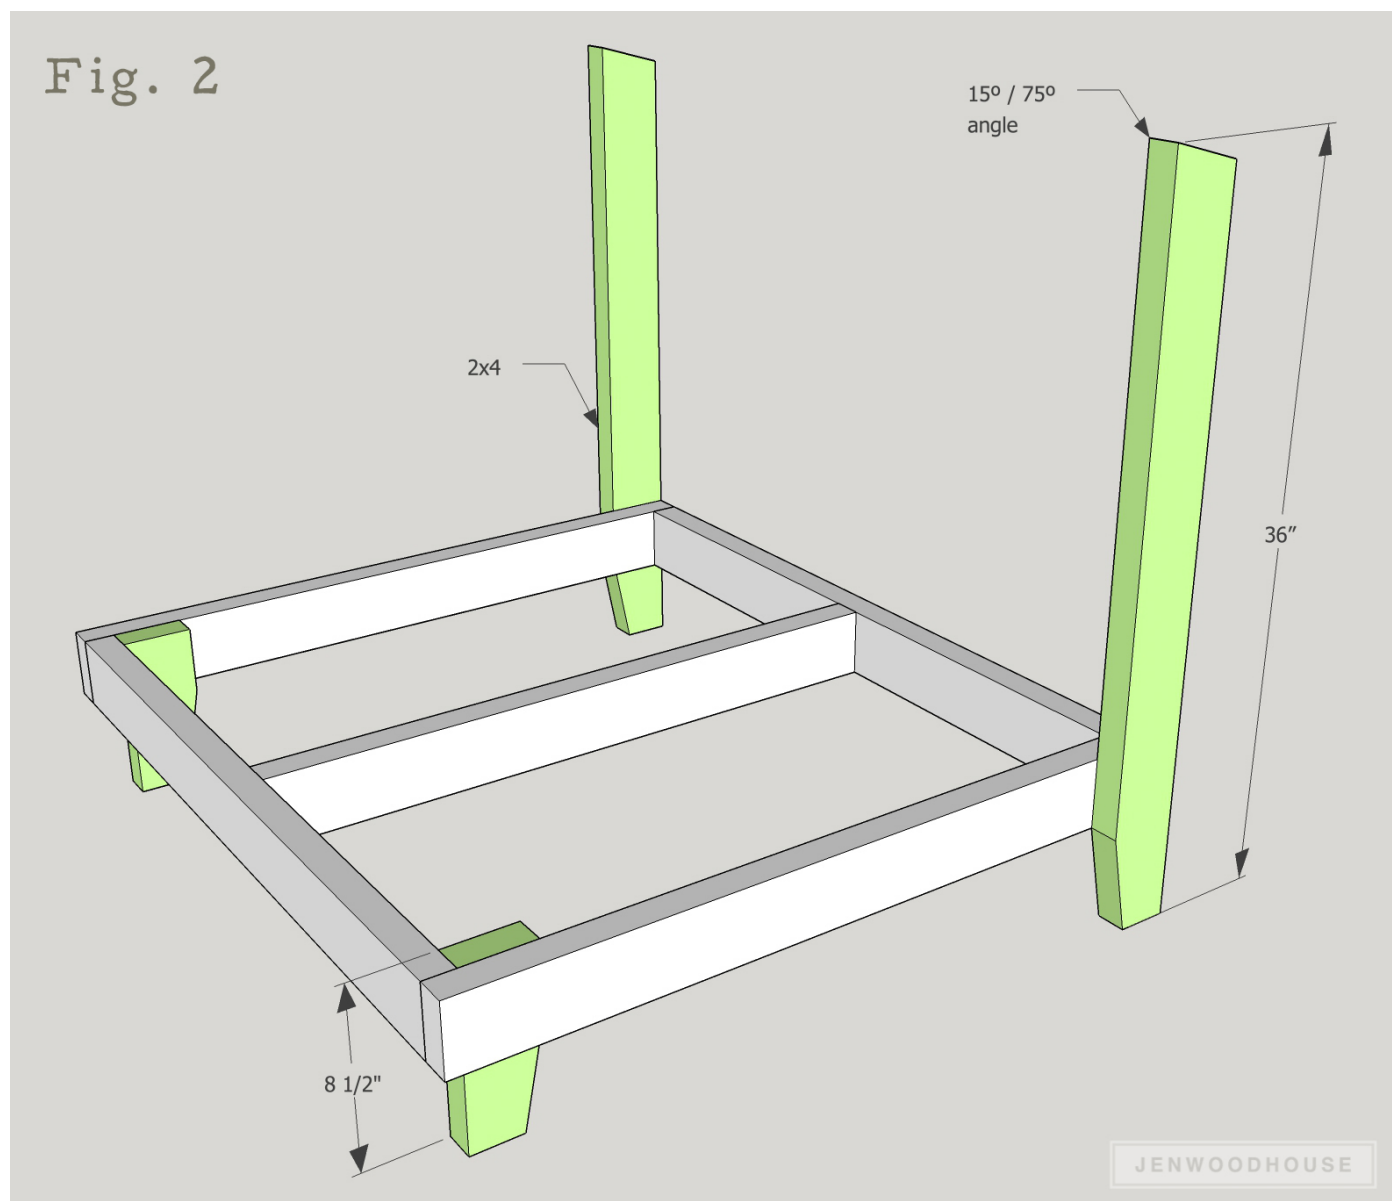


STEP 2 – ATTACH THE BACK LEGS AND FRONT FEET

Measure, mark, and cut 2x4 legs and feet to size. Attach to deck frame with 2 ½ inch exterior wood screws.

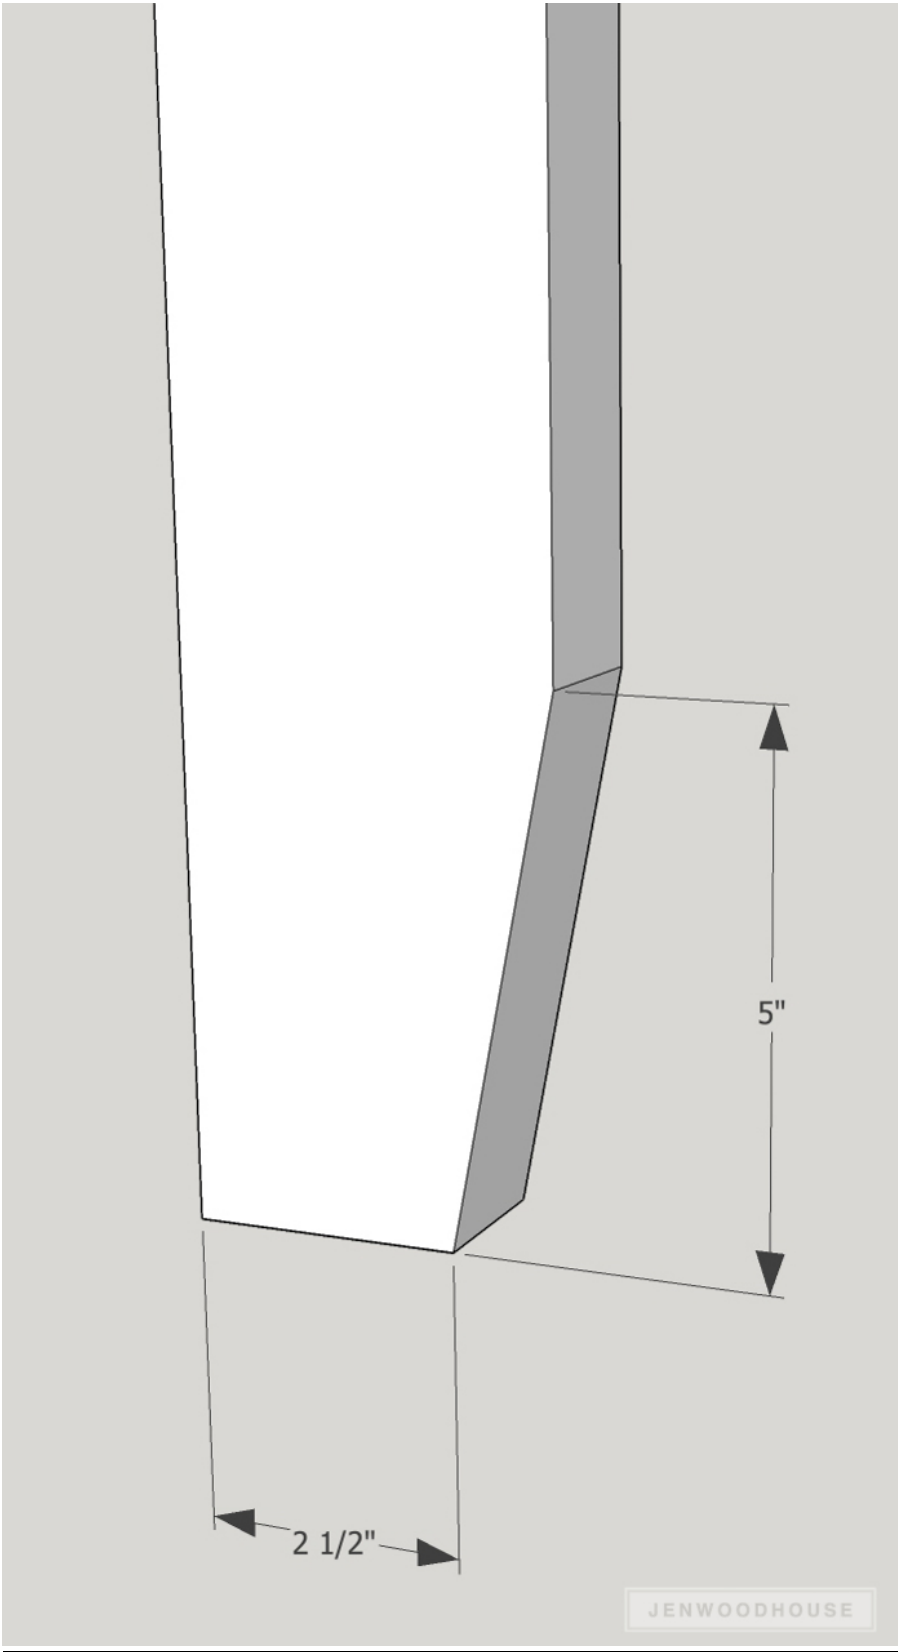


CLOSEUP OF TAPERED FEET

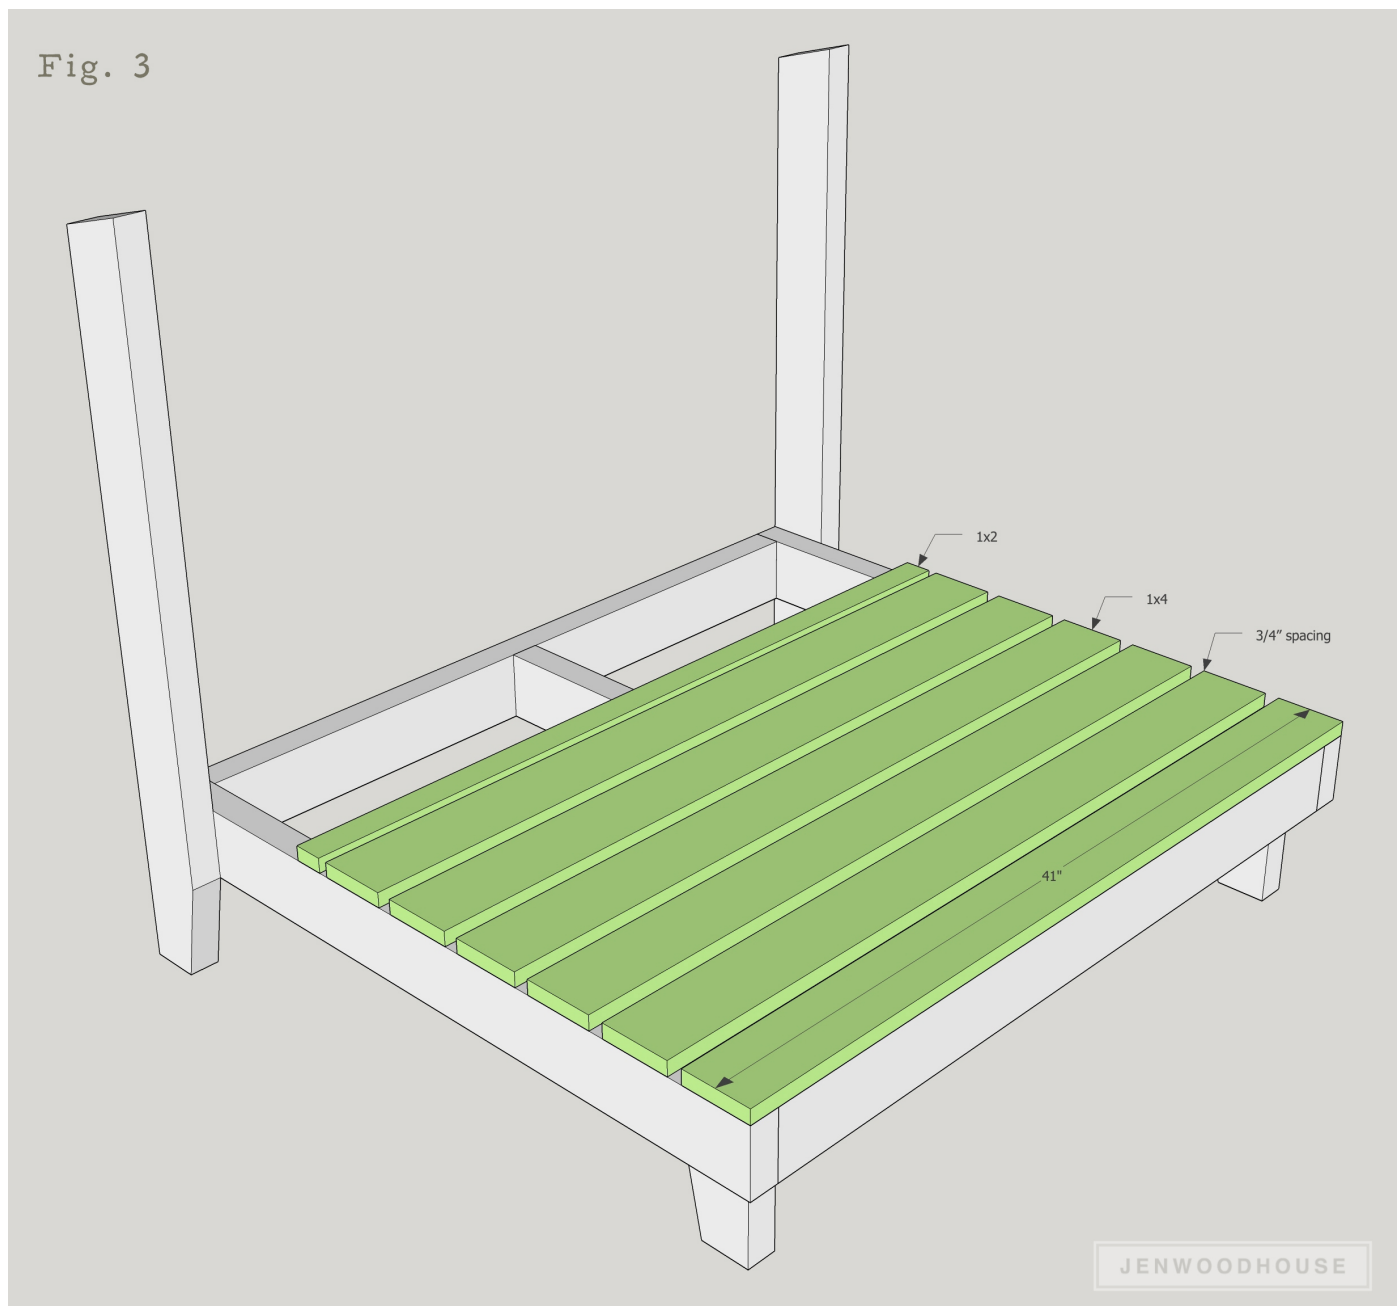



STEP 3 – ATTACH THE DECKING


Measure, mark, and cut decking to length. Attach to deck frame with 1 ¼ inch exterior wood screws. Space slats ¾ inches apart.

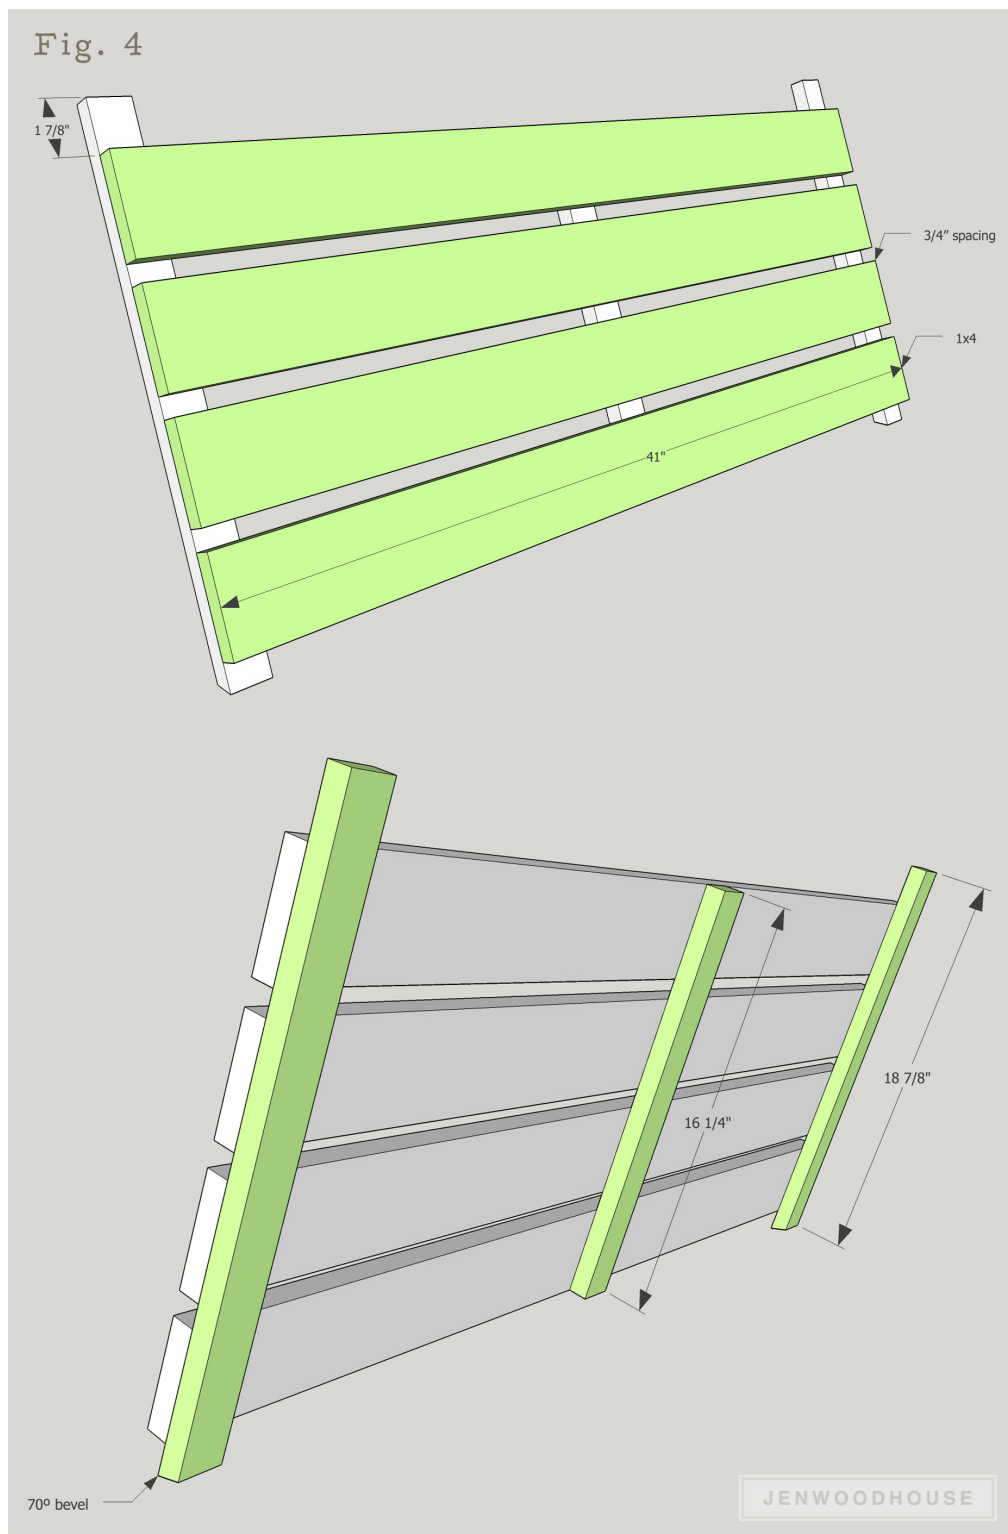

STEP 4 – BUILD THE BACK


Measure, mark, and cut 1x4 and 1x2 boards to length. Construct as shown, attaching with 1 ¼ inch exterior wood screws. Space back slats ¾ inches apart. Place constructed back onto lounge chair and attach with 1 ¼ inch exterior wood screws.

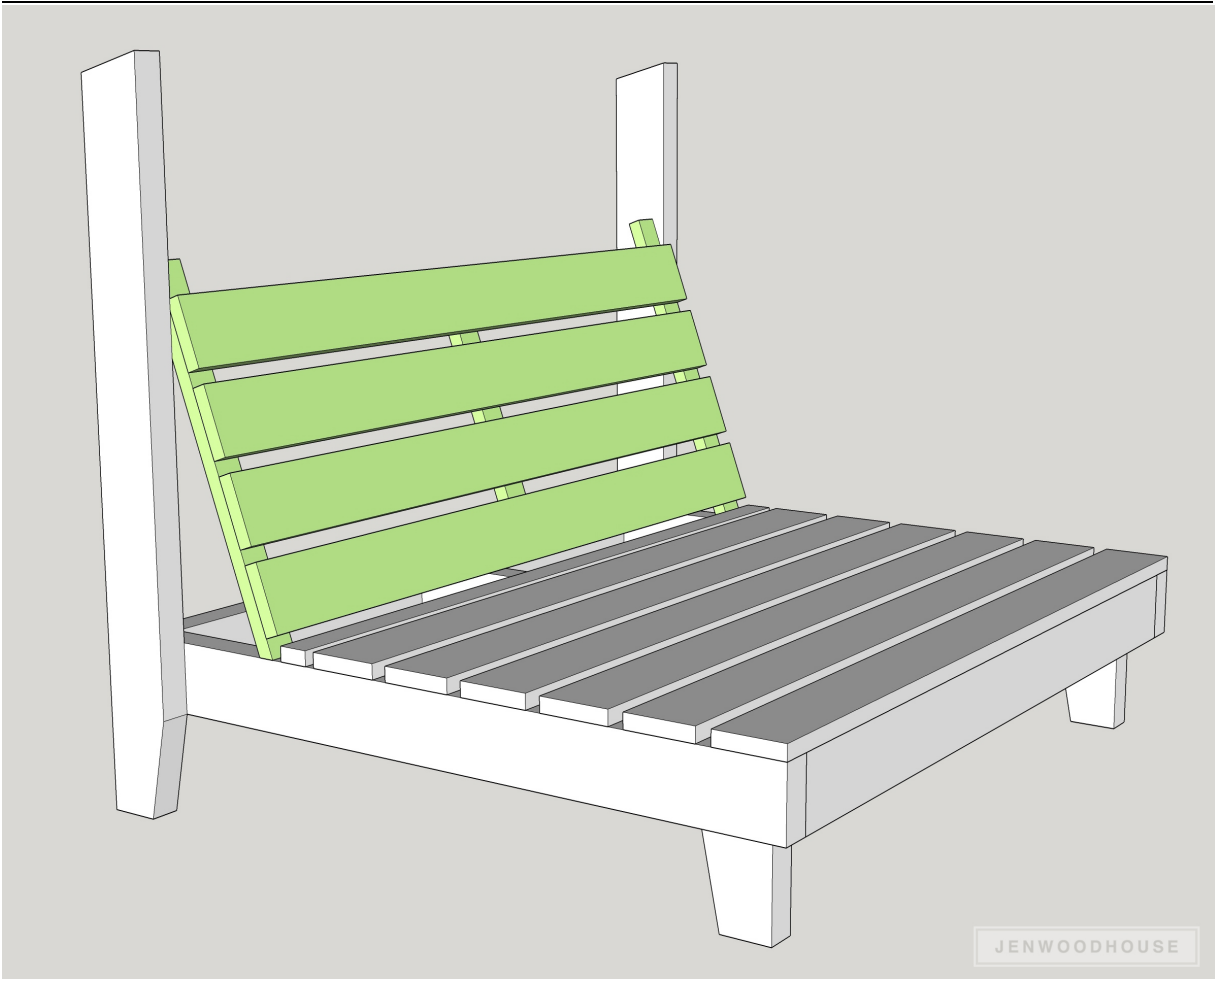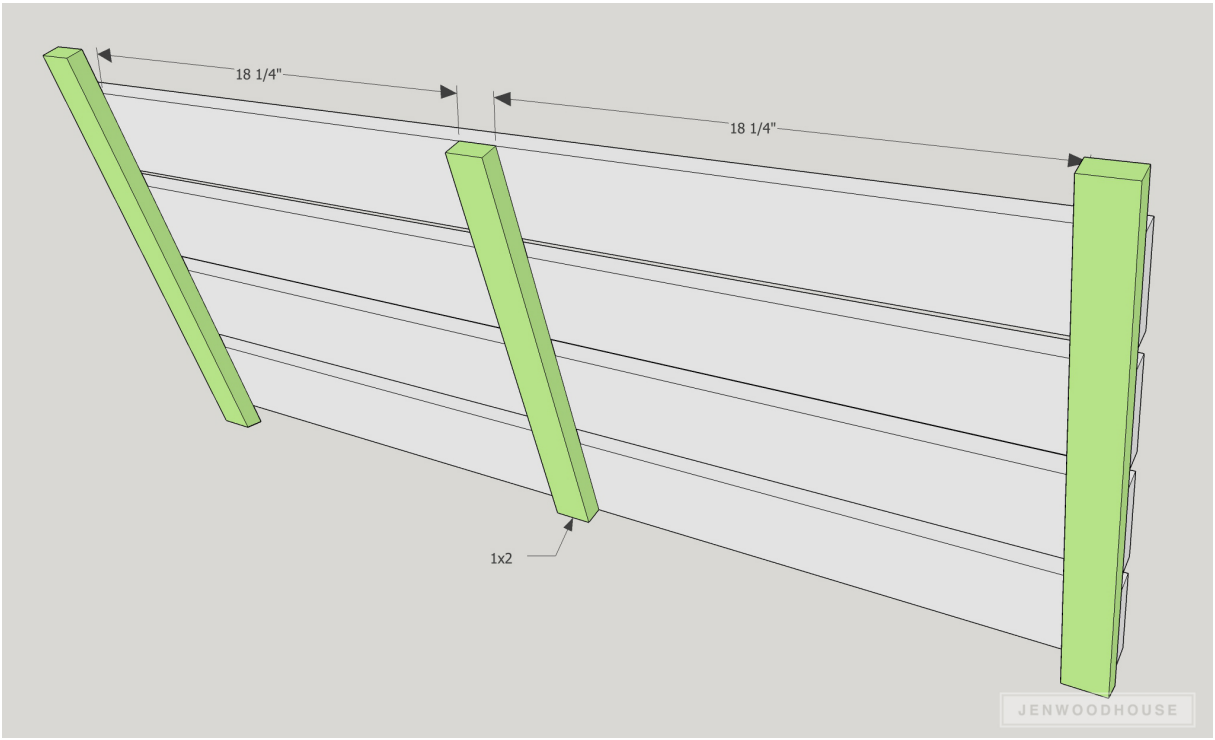

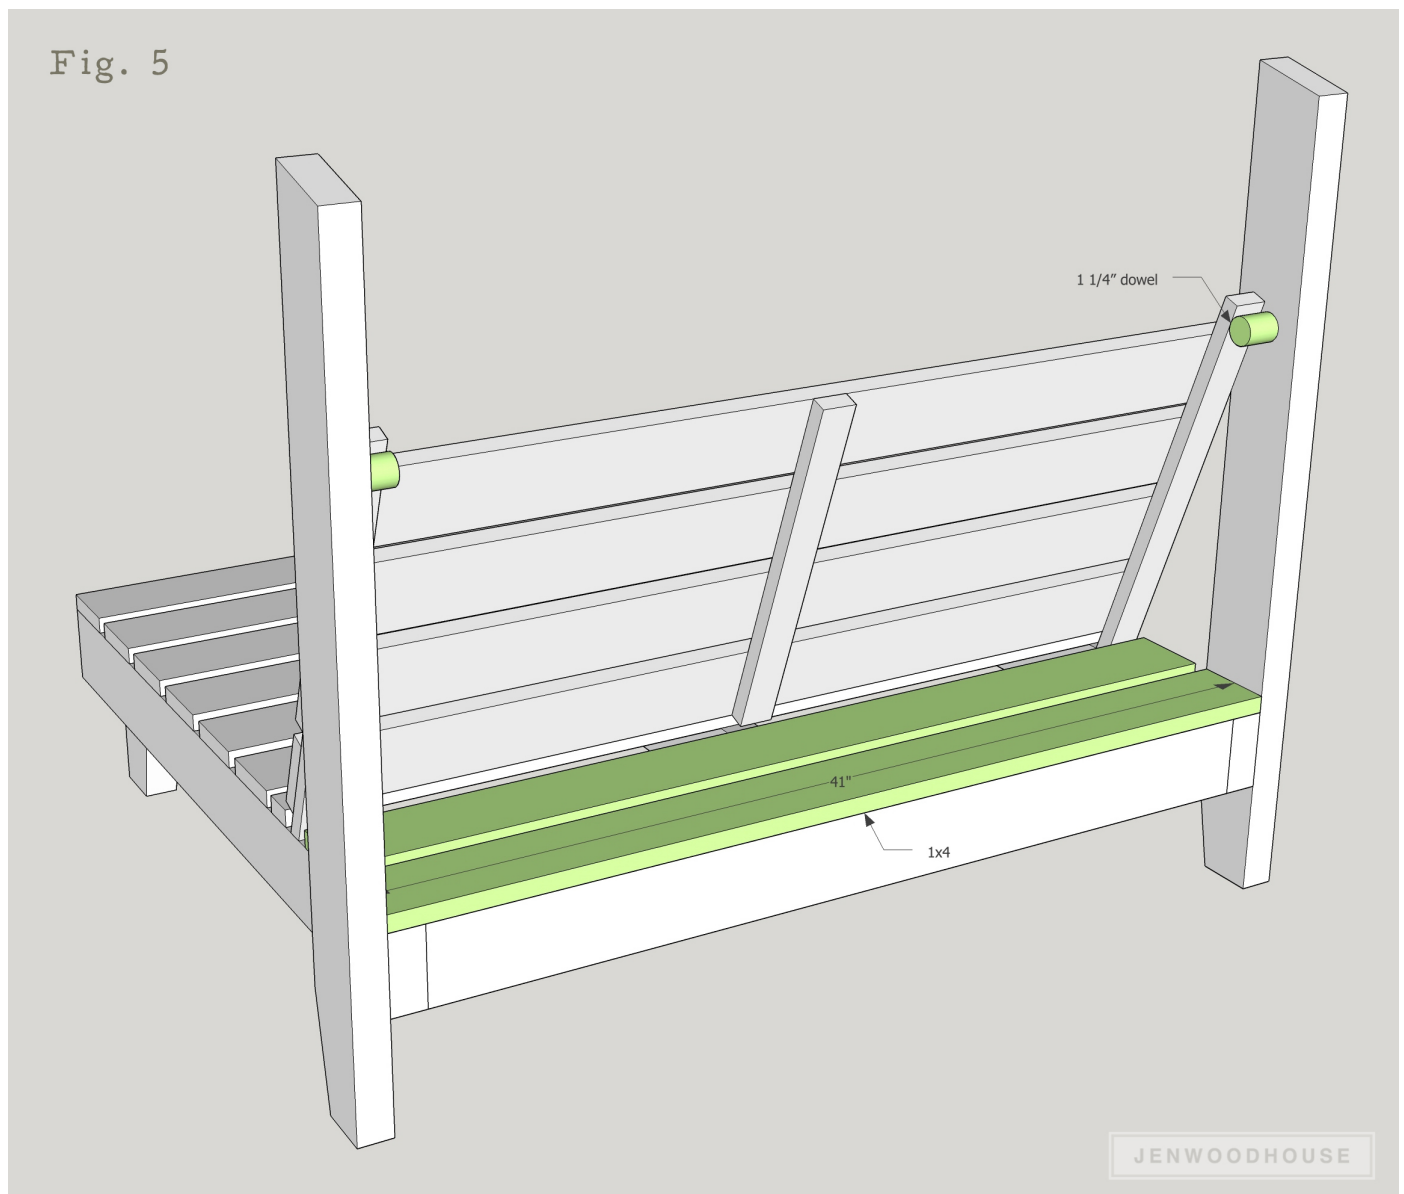


STEP 5 – ATTACH DECKING AND DOWELS

Measure, mark, and cut 1x4 boards to length. Cut 1 ¼ inch diameter dowel to 1 ½ inches long. Attach to lounge chair as shown with 1 ¼ inch exterior wood screws, spacing slats ¾ inches apart.

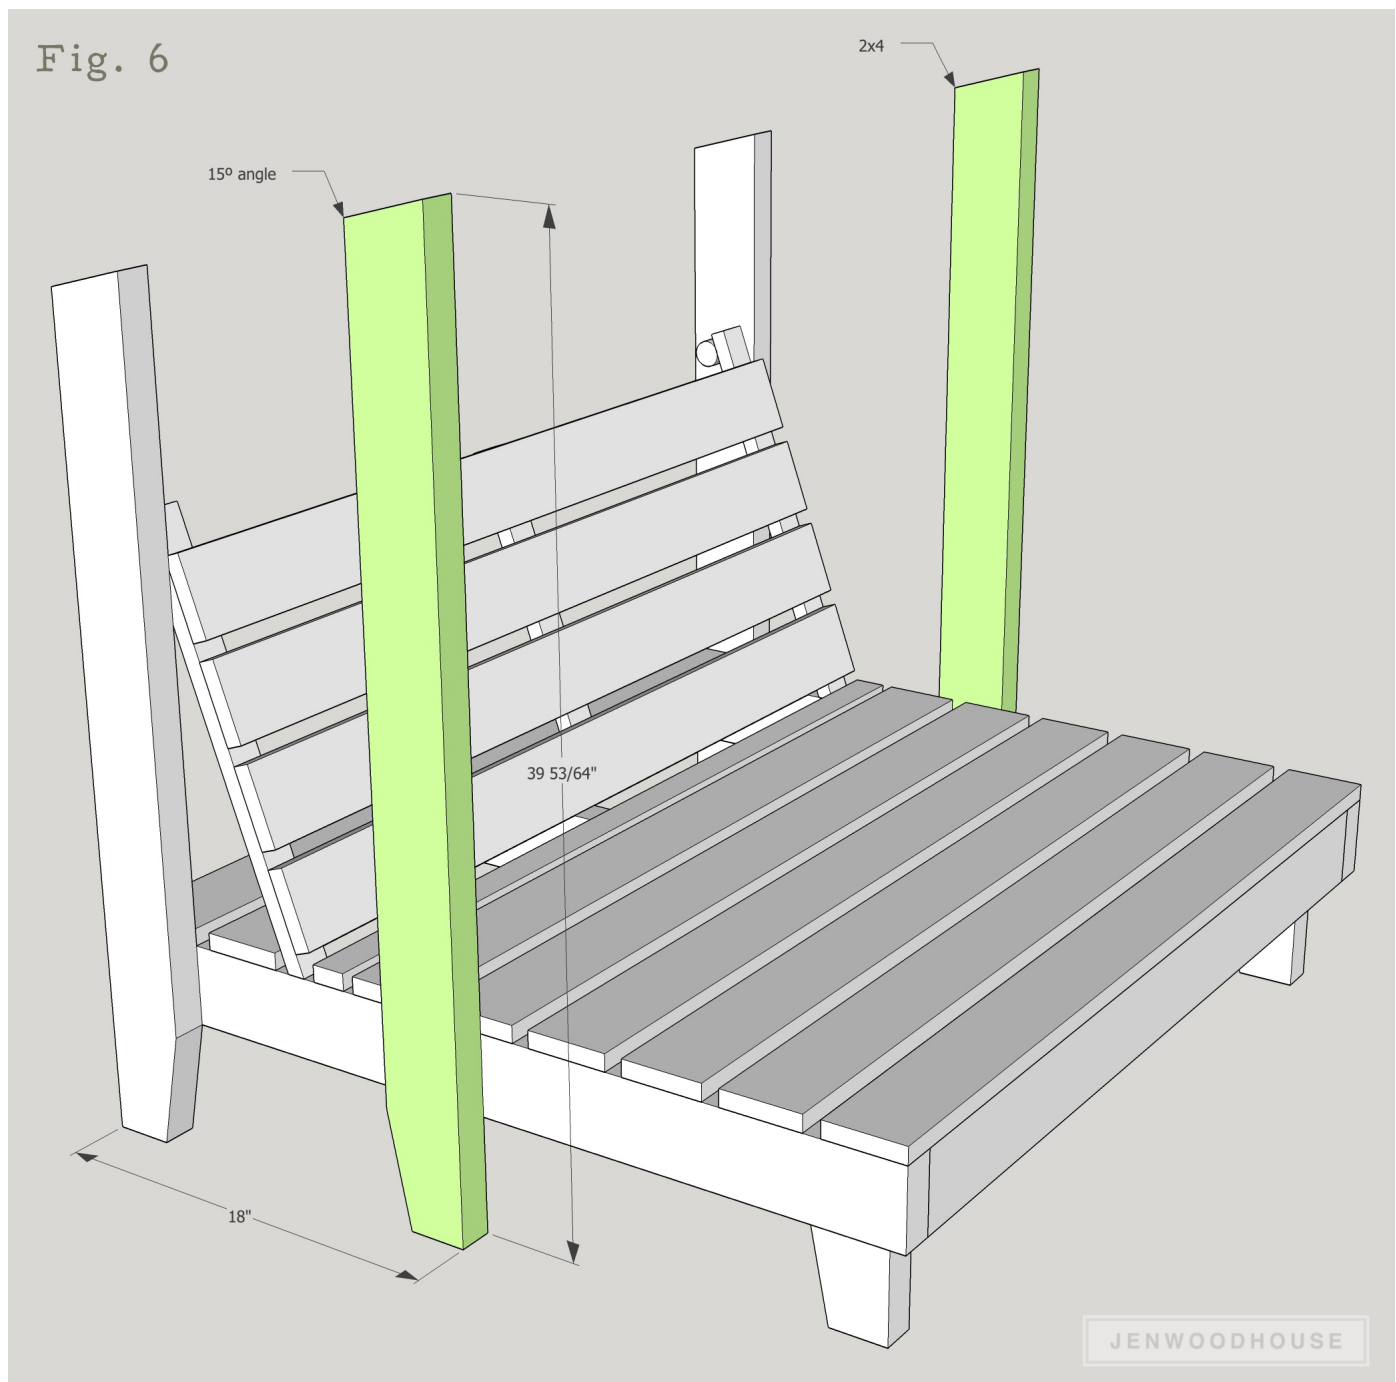

STEP 6 – ATTACH MIDDLE LEGS

Measure, mark, and cut 2x4 middle legs to length. Attach to lounge chair with 2 ½ inch exterior wood screws.

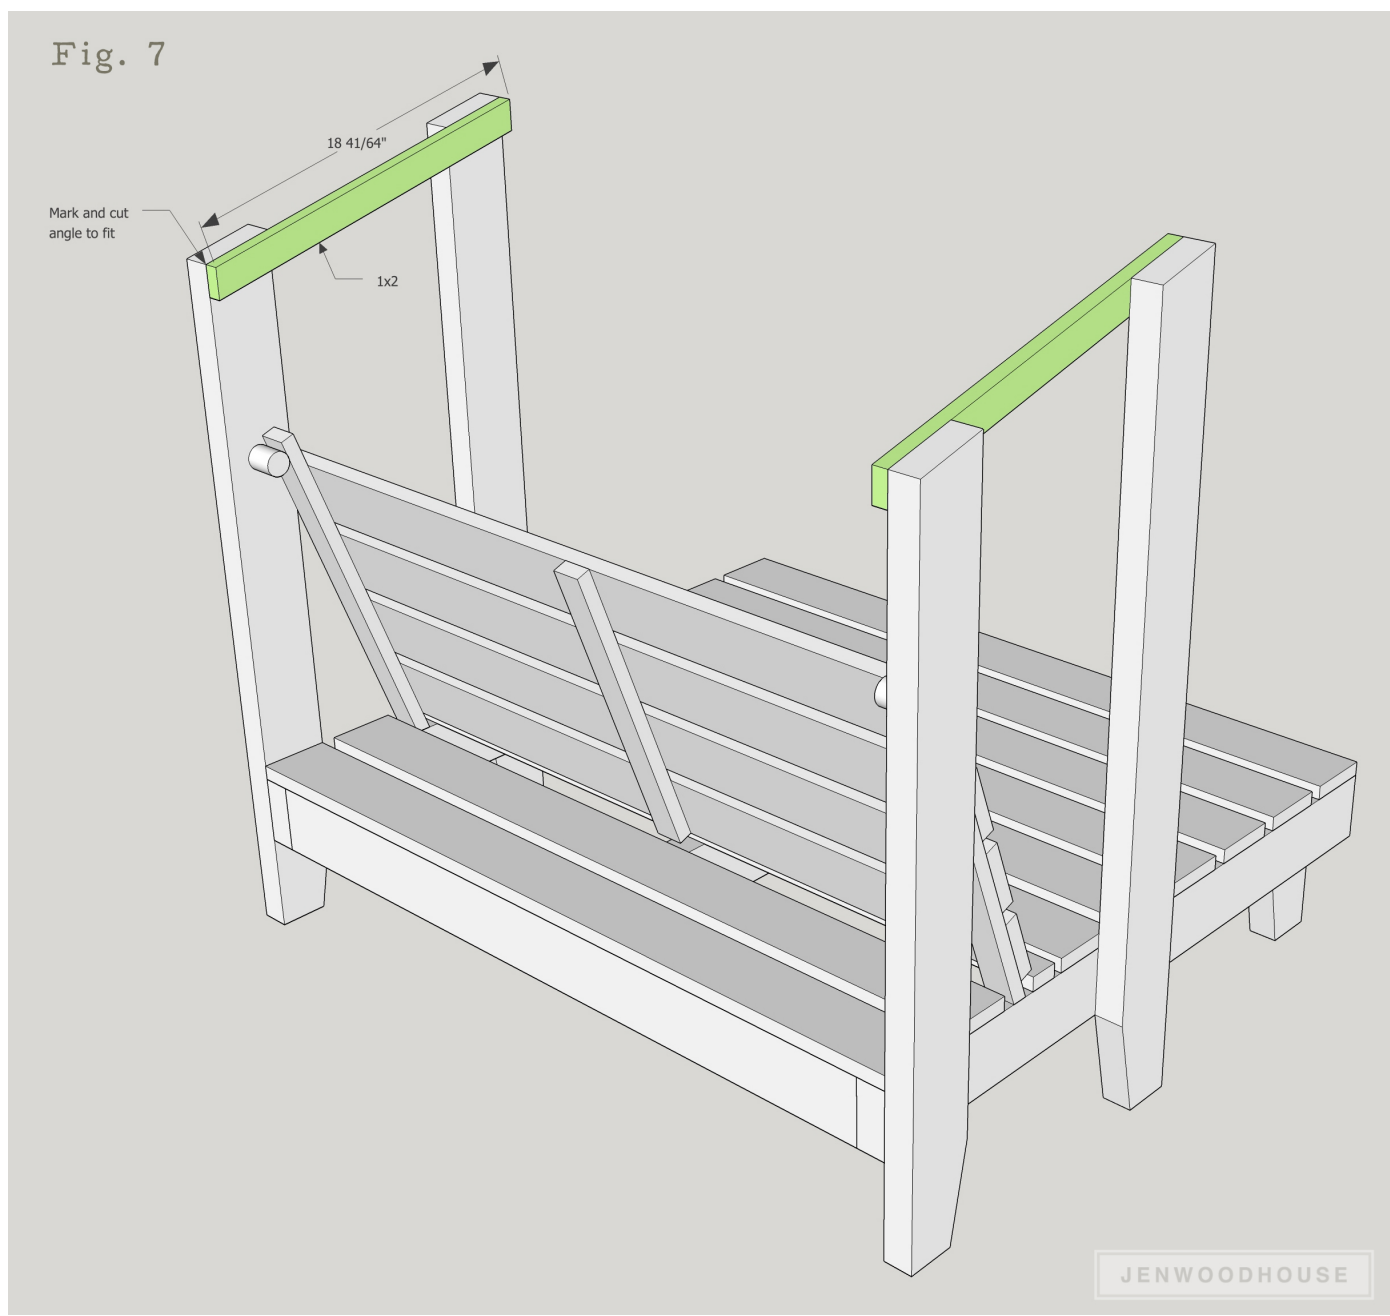


STEP 7 – ATTACH TOP RAILS

Measure, mark, and cut 1x2 rails to length. Attach to legs with 1 ¼ inch exterior wood screws.




STEP 8 – ATTACH TOP RAILS

Measure, mark, and cut 1x2 rails to length. Attach to legs with 1 ¼ inch exterior wood screws.

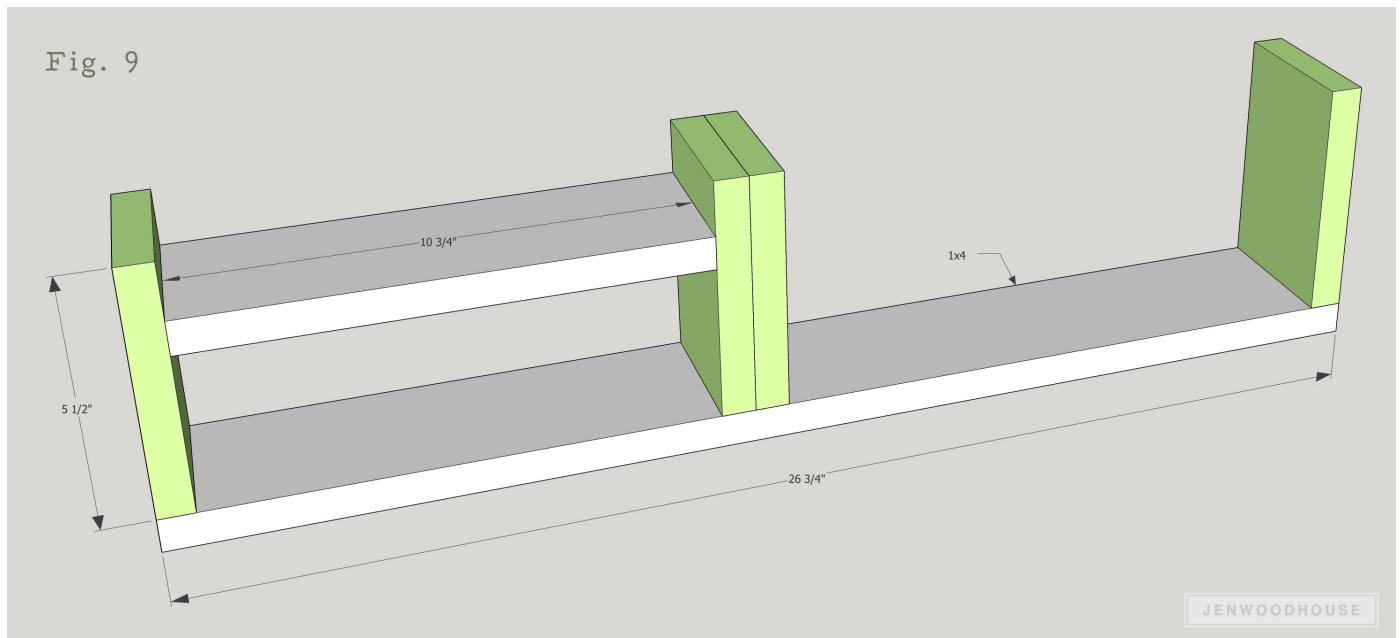


STEP 9 – BUILD THE CONSOLE

Measure, mark, and cut 1x4 boards to length. Construct as shown with 1 ¼ inch brad nails and wood glue.

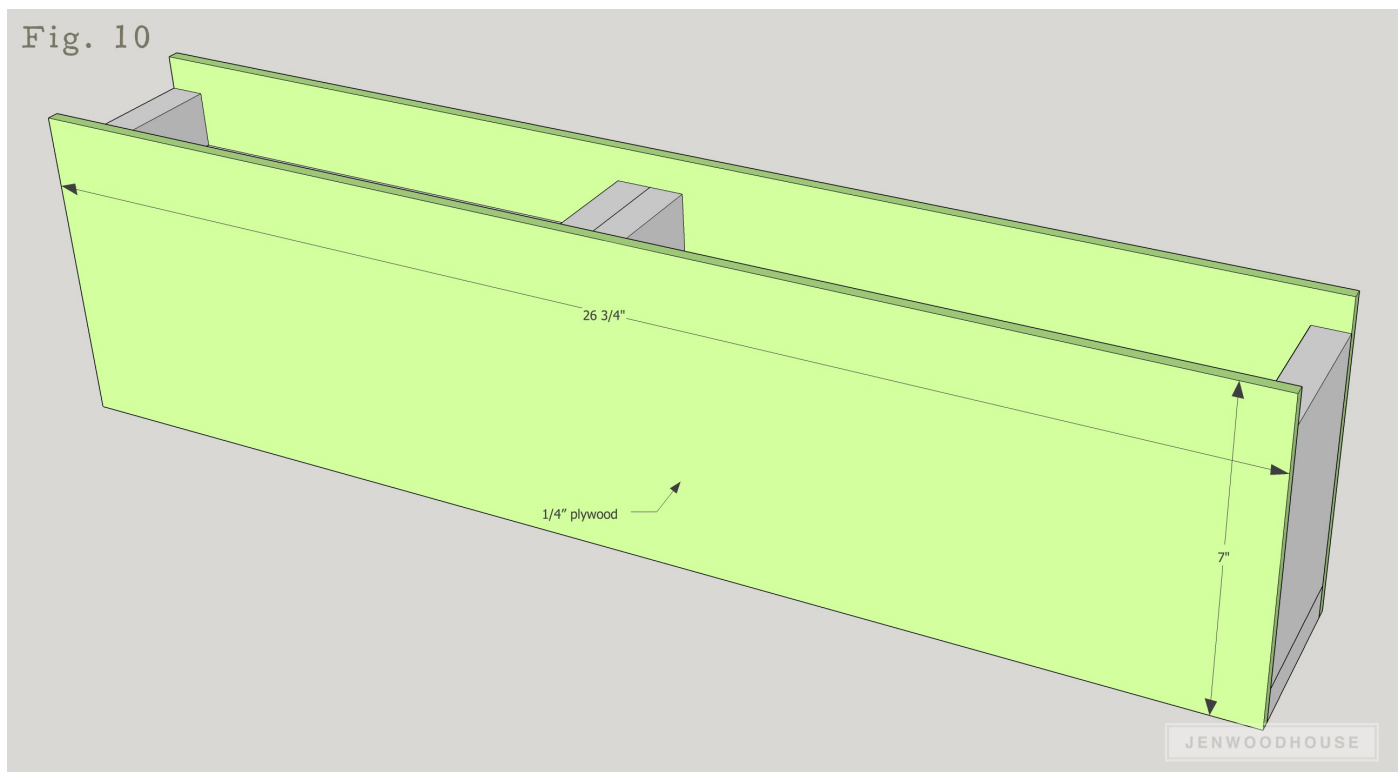

STEP 10 – ATTACH THE SIDES TO THE CONSOLE


Measure, mark, and cut ¼ inch plywood to size and attach to console with 1 ¼ inch brad nails and wood glue.

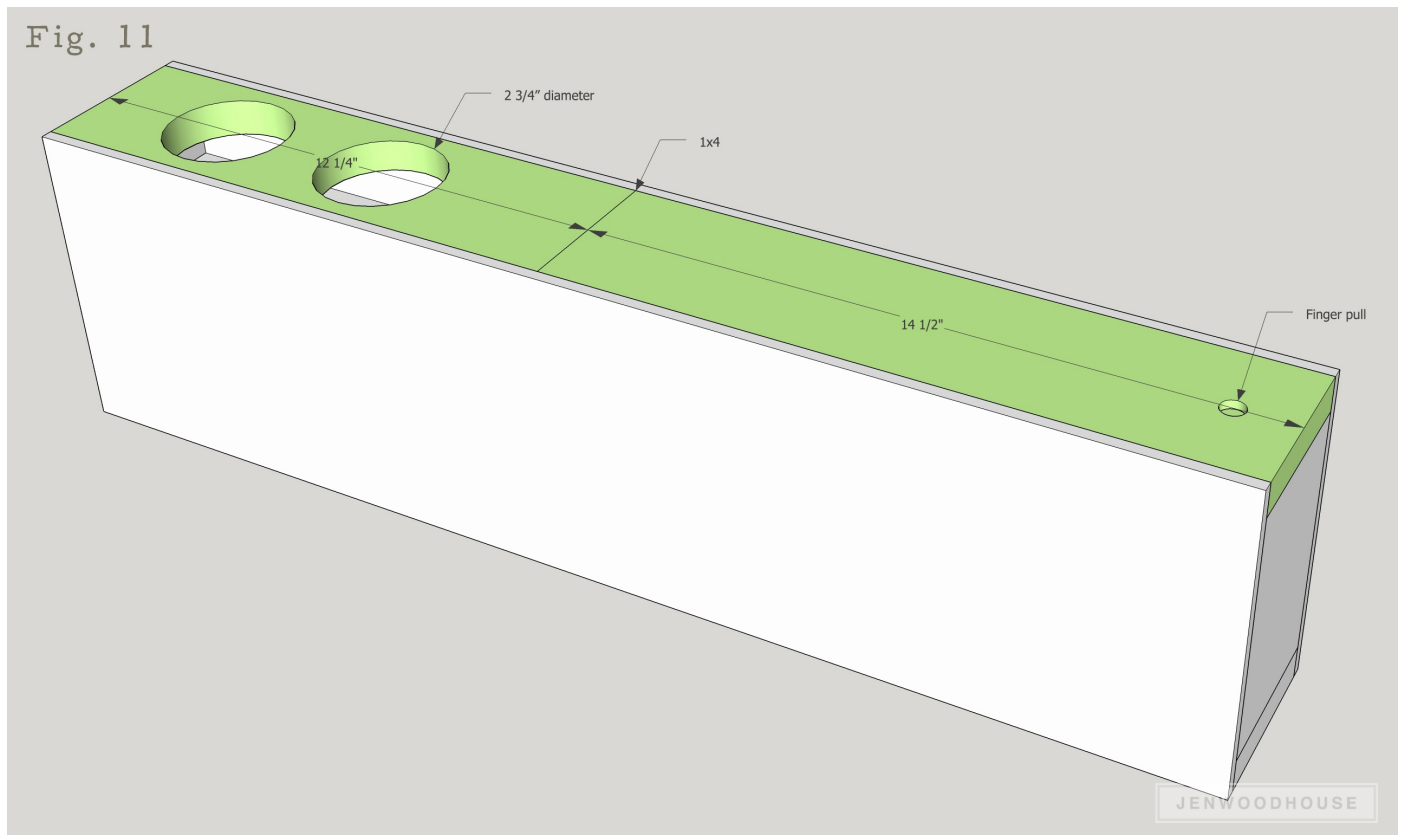

STEP 11 – ATTACH CUP HOLDERS AND LID

Using a 2 ¾ inch hole saw, cut drink holder holes into the shorter 1x4 board as shown. Attach to console with 1 ¼ inch brad nails and wood glue. Drill a finger pull into the longer 1x4 board and attach to console with a small hinge.

Fig. 12

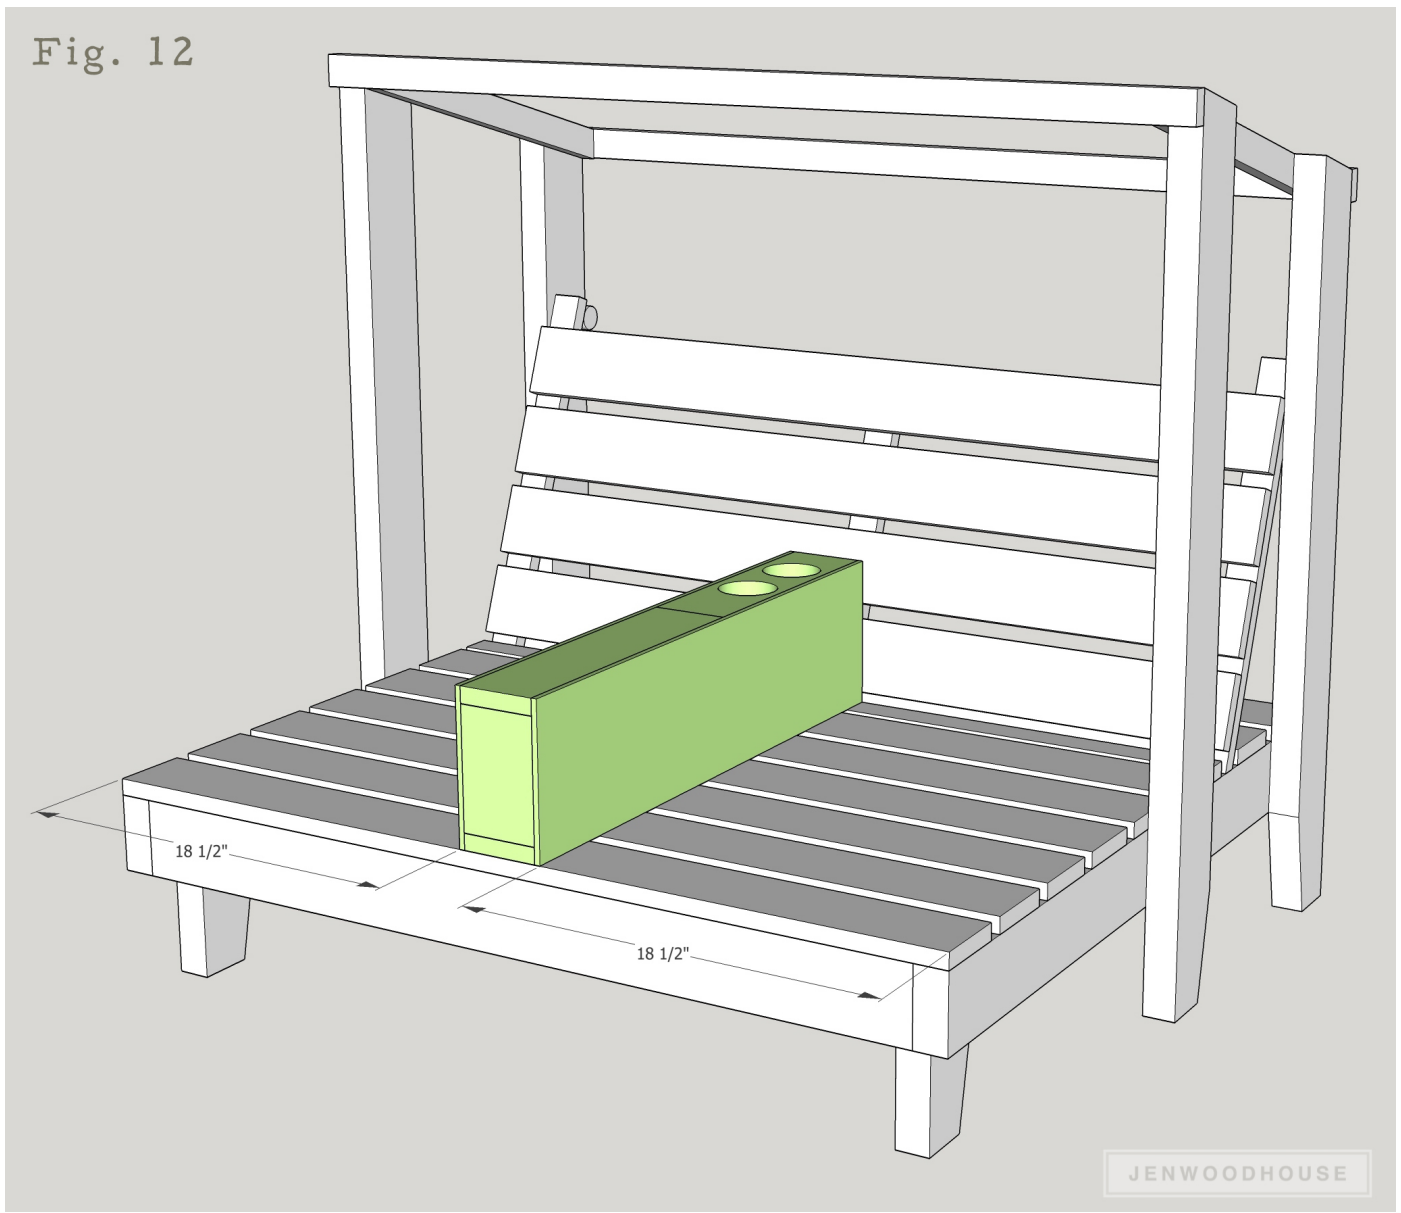

STEP 12 – ATTACH CONSOLE TO LOUNGE CHAIR

Center the console onto the lounge chair and attach with 1 ¼ inch exterior wood screws.

Sand, stain and/or paint, and finish as desired. I purchased the seat cushions from IKEA and used about 3 yards of outdoor fabric for the canopy.